


EQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

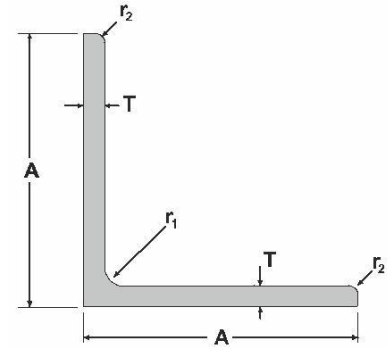

Designation	Dimensions (in mm)			Radius (in mm)		Mass
	A	A	T	r ₁	r ₂	kg/m
15x15x2	15	15	2	2.5	2	0.45
15x15x3	15	15	3	2.5	2	0.65
20x20x2	20	20	2	2.5	2	0.61
20x20x3	20	20	3	3.5	2	0.89
25x25x3	25	25	3	3.5	2	1.13
25x25x4	25	25	4	3.5	2	1.47
25x25x5	25	25	5	3.5	2	1.80
30x30x3	30	30	3	5	2.5	1.37
30x30x4	30	30	4	5	2.5	1.79
30x30x5	30	30	5	5	2.5	2.20
35x35x4	35	35	4	5	2.5	2.11
40x40x3	40	40	3	5	2.5	1.85
40x40x4	40	40	4	6	3	2.43
40x40x5	40	40	5	6	3	3.00
40x40x6	40	40	6	6	3	3.55
45x45x4	45	45	4	6	3.5	2.75
45x45x5	45	45	5	6	3.5	3.40
50x50x3	50	50	3	7	3.5	2.33
50x50x4	50	50	4	7	3.5	3.07
50x50x5	50	50	5	7	3.5	3.80
50x50x6	50	50	6	7	3.5	4.51
60x60x6	60	60	6	8	4	5.47
65x65x6	65	65	6	9	4.5	5.95
65x65x8	65	65	8	9	4.5	7.81

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

EQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

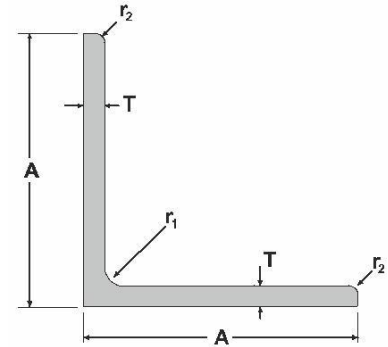

Designation	Dimensions (in mm)			Radius (in mm)		Mass
	A	A	T	r ₁	r ₂	kg/m
65x65x9	65	65	9	9	4.5	8.71
75x75x6	75	75	6	9	4.5	6.91
75x75x8	75	75	8	9	4.5	9.09
75x75x9	75	75	9	9	4.5	10.2
75x75x10	75	75	10	9	4.5	11.2
80x80x6	80	80	6	10	5	7.39
80x80x8	80	80	8	10	5	9.73
90x90x9	90	90	9	10	5	12.3
100x100x6	100	100	6	12	6	9.31
100x100x8	100	100	8	12	6	12.3
100x100x9	100	100	9	12	6	13.8
100x100x10	100	100	10	12	6	15.2
120x120x8*	120	120	8	2	1	14.8
120x120x10	120	120	10	12	6	18.4
120x120x12*	120	120	12	2	1	21.9
120x120x15*	120	120	15	2	1	27.0
125x125x8*	125	125	8	2	1	15.5
125x125x9	125	125	9	12	6	17.4
125x125x10	125	125	10	12	6	19.2
125x125x12	125	125	12	12	6	22.8
125x125x15*	125	125	15	2	1	28.2
130x130x8*	130	130	8	2	1	16.1
130x130x9*	130	130	9	2	1	18.1

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

EQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

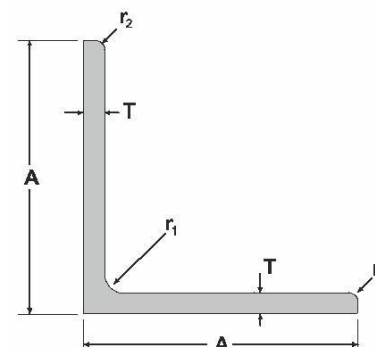

Designation	Dimensions (in mm)			Radius (in mm)		Mass
	A	A	T	r ₁	r ₂	kg/m
130x130x10*	130	130	10	2	1	20.0
130x130x12*	130	130	12	2	1	23.8
130x130x15*	130	130	15	2	1	29.4
150x150x8*	150	150	8	2	1	18.7
150x150x9	150	150	9	12	6	21.0
150x150x10	150	150	10	12	6	23.2
150x150x12	150	150	12	12	6	27.6
150x150x15*	150	150	15	2	1	34.2
175x175x12*	175	175	12	2	1	32.4
175x175x15*	175	175	15	2	1	40.2
200x200x12*	200	200	12	2	1	37.2
200x200x13*	200	200	13	2	1	40.2
200x200x15*	200	200	15	2	1	46.2

Notes :* Profiles are Laser fused with full penetration, equivalent to hot rolled
r₁ = laser welded seam with radius <2 mm, radius r₂ is an approximate value Other sizes can be hot rolled upon request with min. of 25 tons
Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

UNEQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)			Radius (in mm)		Mass
	A	B	T	r ₁	r ₂	kg/m
45x25x4	45	25	4	5	3.5	1.95
45x30x4	45	30	4	5	3.5	2.27
50x30x5	50	30	5	6	3.5	3.00
50x30x6	50	30	6	6	3.5	3.55
50x40x5	50	40	5	6	3.5	3.40
60x40x5	60	40	5	6	3.5	3.80
65x50x5	65	50	5	9	4.5	4.40
65x50x6	65	50	6	9	4.5	5.23
75x50x6	75	50	6	9	4.5	5.71
75x50x8	75	50	8	9	4.5	7.49
75x50x9	75	50	9	9	4.5	8.35
75x65x6	75	65	6	9	4.5	6.43
90x65x6	90	65	6	10	5.0	7.15
90x65x8	90	65	8	10	5.0	9.41
90x75x9	90	75	9	10	5.0	11.2
100x50x6	100	50	6	10	5.0	6.91
100x50x8	100	50	8	10	5.0	9.09
100x50x10	100	50	10	10	5.0	11.2
100x65x6	100	65	6	10	5.0	7.63
100x65x7	100	65	7	10	5.0	8.85
100x65x8	100	65	8	10	5.0	10.0
100x65x9	100	65	9	10	5.0	11.2
100x65x10	100	65	10	10	5.0	12.4
100x75x6	100	75	6	10	5.0	8.11

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

UNEQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
 Annealed and pickled, lengths of 6000 -0/+100 mm

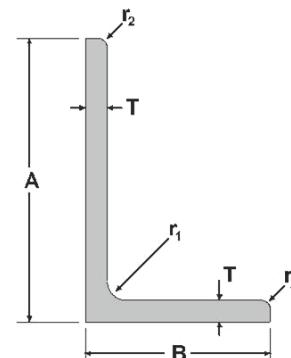

Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	A	B	T	r ₁	r ₂	
100x75x8	100	75	8	10	5.0	10.7
100x75x9	100	75	9	10	5.0	12.0
100x75x10	100	75	10	10	5.0	13.2
125x75x6	125	75	6	11	5.5	9.31
125x75x7*	125	75	7	2	1	10.8
125x75x8*	125	75	8	2	1	12.3
125x75x9	125	75	9	12	6	13.8
125x75x10*	125	75	10	2	1	15.2
125x75x12*	125	75	12	2	1	18.0
125x100x10*	125	100	10	2	1	17.2
130x100x11*	130	100	10	2	1	17.6
150x75x8*	150	75	8	2	1	13.9
150x75x9	150	75	9	2	1	15.6
150x75x10	150	75	10	12	6	17.2
150x75x12*	150	75	12	2	1	20.4
150x75x15*	150	75	15	2	1	25.2
150x90x8*	150	90	8	2	1	14.8
150x90x9	150	90	9	12	6	16.6
150x90x10	150	90	10	12	6	18.4
150x90x12	150	90	12	12	6	21.9
150x90x15*	150	90	15	2	1	27.0
150x100x8*	150	100	8	2	1	15.5
150x100x9*	150	100	9	2	1	17.4
150x100x10	150	100	10	12	6	19.2

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
 Kawasan Perusahaan Selat Kelang Utara,
 42000 Pelabuhan Kelang,
 Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

UNEQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

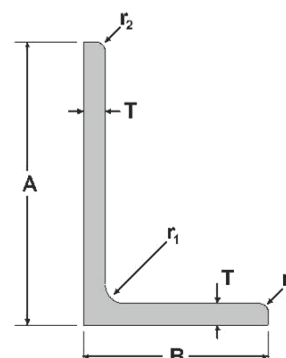

Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	A	B	T	r ₁	r ₂	
150x100x12	150	100	12	12	6	22.8
150x100x15*	150	100	15	2	1	28.2
200x100x10*	200	100	10	2	1	23.2
200x100x12*	200	100	12	2	1	27.6
200x100x15*	200	100	15	2	1	34.2
200x150x12*	200	150	12	2	1	32.4
200x150x15*	200	150	15	2	1	40.2


Notes :* Profiles are Laser fused with full penetration, equivalent to hot rolled
r₁ = laser welded seam with radius <2 mm, radius r₂ is an approximate value Other sizes can be hot rolled upon request with min. of 25 tons
Other stainless steel grades are produced upon request

CHANNELS – standard size

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

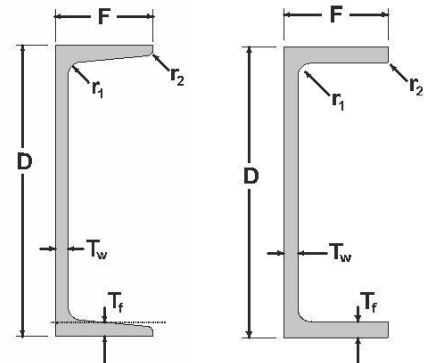

Designation	Dimensions (in mm)				Radius (in mm)		Mass kg/m
	D	F	Tw	Tf	r ₁	r ₂	
50x25x5x6	50	25	5.0	6.0	6	3	3.82
75x40x5x7* ⁺	75	100	6.0	8.0	7	3.5	6.70
100x50x5x7.5* ⁺	100	50	5.0	7.5	7.5	3.75	9.10
125x65x6x8* ⁺	125	65	6.0	8.0	8	4	13.3
150x75x6.5x10* ⁺	150	75	6.5	10.0	10	5	18.2
150x75x9x12.5* ⁺	150	75	9.0	12.5	2	1	23.3
180x75x7x10.5* ⁺	180	75	7.0	10.5	2	1	20.9
200x80x7.5x11* ⁺	200	80	7.5	11.0	2	1	24.1
200x90x8x13.5* ⁺	200	90	8.0	13.5	2	1	29.3
230x80x8x12*	230	80	8.0	12.0	2	1	27.8
250x90x9x13*	250	90	9.0	13.0	2	1	34.0
250x90x11x14.5*	250	90	11.0	14.5	2	1	39.5
300x90x9x12*	300	90	9.0	12.0	2	1	36.6
300x90x10x15.5*	300	90	10.0	15.5	2	1	42.5
300x90x12x16*	300	90	12.0	16.0	2	1	47.7
380x100x10.5x16*	380	100	10.5	16.0	2	1	53.4
380x100x13x16.5*	380	100	13.0	16.5	2	1	61.6
380x100x13x20*	380	100	13.0	20.0	2	1	65.1

Notes : *Profiles are Laser fused with full penetration, equivalent to hot rolled

Laser fused channels have non tapered flanges, r₁ = laser welded seam with radius <2

mm *⁺ Profiles can be hot rolled with a min. quantity of 25 tons

Flange thickness is measured at the centre of the flange

Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

MISCELLANEOUS CHANNELS

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

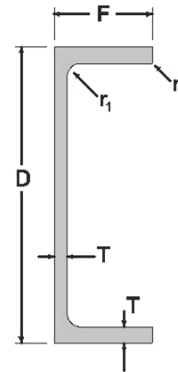

Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	D	F	T	r ₁	r ₂	
40x20x3	40	20	3	3	3	1.78
50x25x3	50	25	3	3	3	2.26
60x30x5	60	30	5	5	3	4.40
60x30x6	60	30	6	6	3	5.18
80x40x4*	80	40	4	2	1	4.86
80x40x5	80	40	5	6	3	6.00
80x40x6	80	40	6	6	3	7.10
100x50x4	100	50	4	6	3	6.14
100x50x5	100	50	5	6	3	7.60
100x50x6	100	50	6	6	3	9.02
120x60x6	120	60	6	6	3	10.9
130x65x6	130	65	6	6	3	11.9
150x75x6	150	75	6	2	1	13.8
150x75x9 ⁺	150	75	9	2	1	20.3
200x100x6*	200	100	6	2	1	18.6
200x100x9*	200	100	9	2	1	27.5
200x100x10*	200	100	10	2	1	30.4

Notes : *Profiles are Laser fused with full penetration, equivalent to hot rolled, r₁ = laser welded seam with radius <2 mm
⁺ Profiles can be hot rolled with a min. quantity of 25 tons
 Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735


www.hoto.com

Company Reg. 285737 -T

STRUCTURAL Tees

LASER FUSED, according to ASTM A1069,
dimensional tolerances and grades, according to
ASTM A276, ASTM A484, ASTM A479, ASME
SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

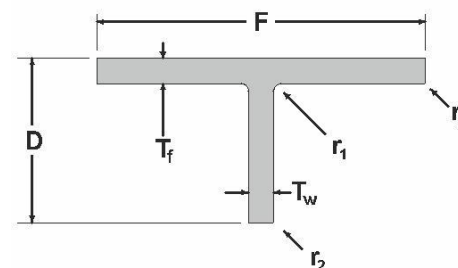

Designation	Dimensions (in mm)				Radius (in mm)		Mass kg/m
	D	F	T _w	T _f	r ₁	r ₂	
50x75	50	75	6	6	2	1	5.71
50x100	50	100	6	8	2	1	8.42
62.5x125	62.5	125	6.5	9	2	1	11.8
75x75	75	75	5	7	2	1	6.92
75x100	75	100	6	9	2	1	10.4
75x150	75	150	7	10	2	1	15.6
87.5x90	87.5	90	5	8	2	1	8.94
87.5x175	87.5	175	7.5	11	2	1	20.0
100x100	100	100	5.5	8	2	1	10.4
100x150	100	150	6	9	2	1	15.2
100x200	100	200	8	12	2	1	24.8
125x125	125	125	6	9	2	1	14.6
125x175	125	175	7	11	2	1	21.8
125x250	125	250	8	13	2	1	33.2
150x150	150	150	5.5	8	2	1	15.8
150x200	150	200	8	12	2	1	28.0
150x300	150	300	10	15	2	1	46.8
175x175	175	175	6	9	2	1	20.6
175x250	175	250	8	12	2	1	34.4
175x350	175	350	10	16	2	1	57.5
200x200	200	200	7	11	2	1	28.2
200x300	200	300	10	16	2	1	53.1
200x400	200	400	13	21	2	1	85.8

Notes : Profiles are Laser fused with full penetration, equivalent to hot rolled
 r_1 = laser welded seam with radius <2 mm
 Other sizes can be produced upon request with D max. 1000 mm
 Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.


Tel : +60 3176 1764
Fax: +60 3176 4735
www.hoto.com

Company Reg. 285737 -T

T BARS

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	A	A	T	r ₁	r ₂	
20x20x3*	20	20	3	3	2.5	0.89
25x25x3	25	25	3	2	1	1.13
30x30x3	30	30	3	2	1	1.37
30x30x4	30	30	4	2	1	1.79
40x40x3	40	40	3	2	1	1.85
40x40x4	40	40	4	2	1	2.43
40x40x5	40	40	5	2	1	3.00
45x45x4	45	45	4	2	1	2.75
50x50x3	50	50	3	2	1	2.33
50x50x4	50	50	4	2	1	3.07
50x50x5	50	50	5	2	1	3.80
50x50x6	50	50	6	2	1	4.51
60x60x6	60	60	6	2	1	5.47
65x65x6	65	65	6	2	1	5.95
65x65x9	65	65	9	2	1	8.71
70x70x7	70	70	7	2	1	7.45
75x75x6	75	75	6	2	1	6.91
75x75x9	75	75	9	2	1	10.2
80x80x8	80	80	8	2	1	9.73
90x90x9	90	90	9	2	1	12.3
100x100x6	100	100	6	2	1	9.31
100x100x8	100	100	8	2	1	12.3
100x100x9	100	100	9	2	1	13.8
100x100x10	100	100	10	2	1	15.2

*Hot rolled size

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735


www.hoto.com

Company Reg. 285737 -T

T BARS

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	A	A	T	r ₁	r ₂	
120x120x10	120	120	10	2	1	18.4
120x120x13	120	120	13	2	1	23.6
125x125x6	125	125	6	2	1	11.7
125x125x9	125	125	9	2	1	17.4
140x140x10	140	140	10	2	1	21.6
140x140x13	140	140	13	2	1	27.8
150x150x6	150	150	6	2	1	14.1
150x150x9	150	150	9	2	1	21.0

Notes : Profiles are Laser fused with full penetration, equivalent to hot rolled

r₁ = laser welded seam with radius <2 mm

Other sizes can be produced upon request with A max. 1000 mm

Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735


www.hoto.com

Company Reg. 285737 -T

UNIVERSAL BEAMS AND COLUMNS

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)				Radius (in mm)		Mass kg/m
	D	F	Tw	Tf	r ₁	r ₂	
100x50	100	50	5	7	2	1	9.0
100x100	100	100	5	7	2	1	14.6
	100	100	6	8	2	1	16.8
125x60	125	60	6	8	2	1	12.9
125x125	125	125	6.5	9	2	1	23.6
150x75	150	75	5	7	2	1	13.8
150x100	148	100	6	9	2	1	20.6
150x150	150	150	7	10	2	1	31.3
	154	151	8	12	2	1	37.3
175x90	175	90	5	8	2	1	17.9
175x125	175	125	5.5	8	2	1	23.0
175x175	171	174	6	9	2	1	32.4
	175	175	7.5	11	2	1	40.0
200x100	198	99	4.5	7	2	1	17.7
	200	100	5.5	8	2	1	20.9
200x150	194	150	6	9	2	1	30.0
	198	151	7	11	2	1	36.4
200x200	196	199	6.5	10	2	1	41.0
	200	200	8	12	2	1	49.7
	204	201	9	14	2	1	57.7
	208	202	10	16	2	1	65.8
250x125	248	124	5	8	2	1	25.2
	250	125	6	9	2	1	29.1
250x175	244	175	7	11	2	1	43.2
	248	176	8	13	2	1	50.8
	252	177	9	15	2	1	58.5

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735


www.hoto.com

Company Reg. 285737 -T

UNIVERSAL BEAMS AND COLUMNS

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)				Radius (in mm)		Mass kg/m
	D	F	Tw	Tf	r ₁	r ₂	
250x250	248	249	8	13	2	1	66.0
	250	250	9	14	2	1	72.0
	260	253	12	19	2	1	98.2
300x150	294	148	4.5	6	2	1	24.4
	298	149	5.5	8	2	1	31.5
	300	150	6.5	9	2	1	36.3
	304	150	6.5	11	2	1	41.1
	306	151	7.5	12	2	1	45.9
	318	154	11	18	2	1	69.2
300x200	290	199	7	10	2	1	47.0
	294	200	8	12	2	1	55.7
	298	201	9	14	2	1	64.5
	304	202	10	17	2	1	76.5
300x300	298	299	9	14	2	1	86.4
	300	300	10	15	2	1	93.6
	304	301	11	17	2	1	105.6
	310	303	13	20	2	1	125.0
	310	305	15	20	2	1	130.0
	312	310	20	21	2	1	147.4
350x175	346	174	6	9	2	1	40.8
	350	175	7	11	2	1	49.2
	354	176	8	13	2	1	57.6
	358	177	9	15	2	1	66.1
	360	178	10	16	2	1	71.8
	364	177	11	18	2	1	79.8

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735


www.hoto.com

Company Reg. 285737 -T

UNIVERSAL BEAMS AND COLUMNS

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)				Radius (in mm)		Mass
	D	F	Tw	Tf	r ₁	r ₂	kg/m
350x350	344	348	10	16	2	1	114.0
	350	350	12	19	2	1	136.4
400x200	396	199	7	11	2	1	56.0
	400	200	8	13	2	1	65.5
	404	201	9	15	2	1	75.2
	410	202	10	18	2	1	88.1
400x300	386	299	9	14	2	1	92.8
	390	300	10	16	2	1	105.4
	396	302	12	19	2	1	126.2
400x400	388	402	15	15	2	1	139.4
	394	398	11	18	2	1	146.1
	400	400	13	21	2	1	171.6
450x200	446	199	8	12	2	1	65.2
	450	200	9	14	2	1	75.2
	456	201	10	17	2	1	88.4
	460	202	11	19	2	1	98.5
	460	205	14	19	2	1	109.6
450x300	434	299	10	15	2	1	104.1
	440	300	11	18	2	1	122.0
	446	302	13	21	2	1	143.5
500x200	496	199	9	14	2	1	78.3
	500	200	10	16	2	1	88.6
	506	201	11	19	2	1	102.3
	512	202	12	22	2	1	116.0

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735


www.hoto.com

Company Reg. 285737 -T

UNIVERSAL BEAMS AND COLUMNS

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)				Radius (in mm)		Mass
	D	F	Tw	Tf	r ₁	r ₂	kg/m
500x300	482	300	11	15	2	1	111.8
	488	300	11	18	2	1	126.2
	494	302	13	21	2	1	148.5
600x200	592	197	8	13	2	1	77.2
	596	199	10	15	2	1	93.0
	600	200	11	17	2	1	104.2
	606	201	12	20	2	1	118.7
600x300	582	300	12	17	2	1	134.2
	588	300	12	20	2	1	148.6
	594	302	14	23	2	1	172.5
700x300	692	300	13	20	2	1	163.8
	700	300	13	24	2	1	183.0
800x300	792	300	14	22	2	1	189.4
	800	300	14	26	2	1	208.6
900x300	890	299	15	23	2	1	211.3

Notes : Profiles are Laser fused with full penetration, equivalent to hot rolled

r₁ = laser welded seam with radius <2 mm

Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com

Company Reg. 285737 -T