


UNEQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm



Designation	Dimensions (in mm)			Radius (in mm)		Mass
	A	B	T	r ₁	r ₂	kg/m
45x25x4	45	25	4	5	3.5	1.95
45x30x4	45	30	4	5	3.5	2.27
50x30x5	50	30	5	6	3.5	3.00
50x30x6	50	30	6	6	3.5	3.55
50x40x5	50	40	5	6	3.5	3.40
60x40x5	60	40	5	6	3.5	3.80
65x50x5	65	50	5	9	4.5	4.40
65x50x6	65	50	6	9	4.5	5.23
75x50x6	75	50	6	9	4.5	5.71
75x50x8	75	50	8	9	4.5	7.49
75x50x9	75	50	9	9	4.5	8.35
75x65x6	75	65	6	9	4.5	6.43
90x65x6	90	65	6	10	5.0	7.15
90x65x8	90	65	8	10	5.0	9.41
90x75x9	90	75	9	10	5.0	11.2
100x50x6	100	50	6	10	5.0	6.91
100x50x8	100	50	8	10	5.0	9.09
100x50x10	100	50	10	10	5.0	11.2
100x65x6	100	65	6	10	5.0	7.63
100x65x7	100	65	7	10	5.0	8.85
100x65x8	100	65	8	10	5.0	10.0
100x65x9	100	65	9	10	5.0	11.2
100x65x10	100	65	10	10	5.0	12.4
100x75x6	100	75	6	10	5.0	8.11

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

UNEQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

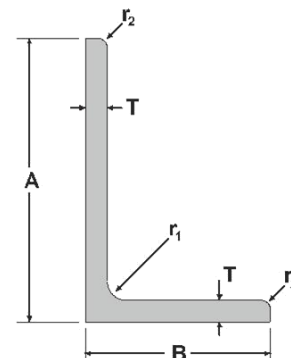

Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	A	B	T	r ₁	r ₂	
100x75x8	100	75	8	10	5.0	10.7
100x75x9	100	75	9	10	5.0	12.0
100x75x10	100	75	10	10	5.0	13.2
125x75x6	125	75	6	11	5.5	9.31
125x75x7*	125	75	7	2	1	10.8
125x75x8*	125	75	8	2	1	12.3
125x75x9	125	75	9	12	6	13.8
125x75x10*	125	75	10	2	1	15.2
125x75x12*	125	75	12	2	1	18.0
125x100x10*	125	100	10	2	1	17.2
130x100x11*	130	100	10	2	1	17.6
150x75x8*	150	75	8	2	1	13.9
150x75x9	150	75	9	2	1	15.6
150x75x10	150	75	10	12	6	17.2
150x75x12*	150	75	12	2	1	20.4
150x75x15*	150	75	15	2	1	25.2
150x90x8*	150	90	8	2	1	14.8
150x90x9	150	90	9	12	6	16.6
150x90x10	150	90	10	12	6	18.4
150x90x12	150	90	12	12	6	21.9
150x90x15*	150	90	15	2	1	27.0
150x100x8*	150	100	8	2	1	15.5
150x100x9*	150	100	9	2	1	17.4
150x100x10	150	100	10	12	6	19.2

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com


Company Reg. 285737 -T

UNEQUAL ANGLES

HOT ROLLED, dimensional tolerances and grades according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

LASER FUSED, according to ASTM A1069, dimensional tolerances and grades, according to ASTM A276, ASTM A484, ASTM A479, ASME SA479, MTC EN 10204 3.1

Standard stainless steel grades 304/L and 316/L
Annealed and pickled, lengths of 6000 -0/+100 mm

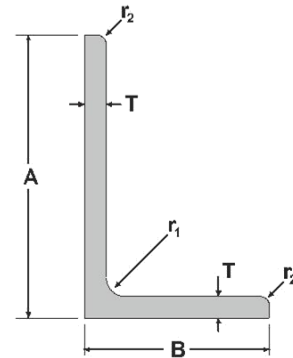

Designation	Dimensions (in mm)			Radius (in mm)		Mass kg/m
	A	B	T	r ₁	r ₂	
150x100x12	150	100	12	12	6	22.8
150x100x15*	150	100	15	2	1	28.2
200x100x10*	200	100	10	2	1	23.2
200x100x12*	200	100	12	2	1	27.6
200x100x15*	200	100	15	2	1	34.2
200x150x12*	200	150	12	2	1	32.4
200x150x15*	200	150	15	2	1	40.2

Notes : * Profiles are Laser fused with full penetration, equivalent to hot rolled
r₁ = laser welded seam with radius <2 mm, radius r₂ is an approximate value
Other sizes can be hot rolled upon request with min. of 25 tons
Other stainless steel grades are produced upon request

HOTO STAINLESS STEEL INDUSTRIES SDN BHD

Lot 3, Solok Sultan Hishamuddin 8,
Kawasan Perusahaan Selat Kelang Utara,
42000 Pelabuhan Kelang,
Selangor, Malaysia.

Tel : +60 3176 1764

Fax: +60 3176 4735

www.hoto.com

Company Reg. 285737 -T